


DOORS

MODEL LITE 60 S

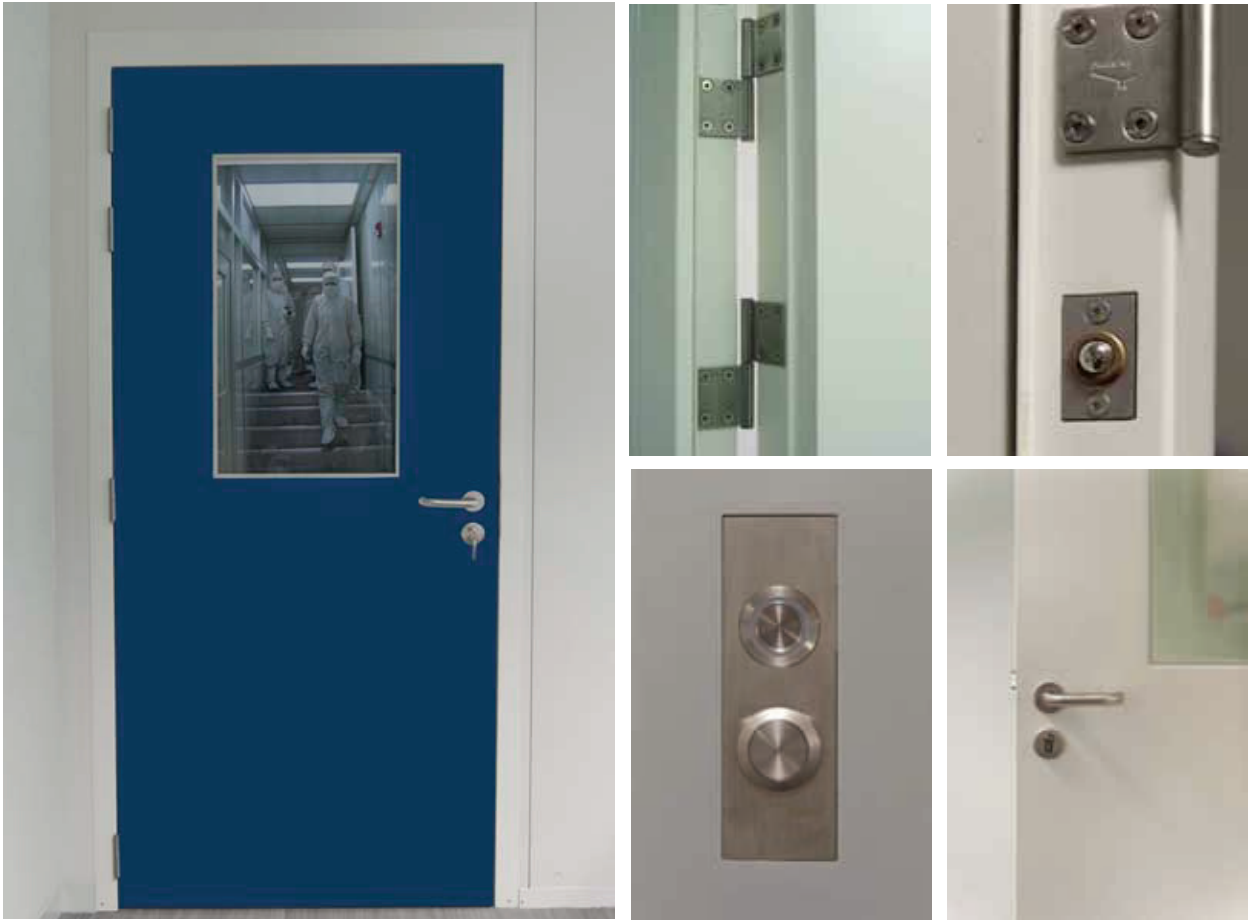

Description

Single or double door, door leaf thickness 60 mm. Door leaf consists of 2 steel sheets 0.8mm and rock wool core M0 (density 100kg/m³). Steel sheets pre-lacquered (see standard colours), powder coated (other colours) or stainless steel.

2 part frame counter frame adapted to wall thickness with welded corners. Frame fabricated in bended zinc coated epoxy powder coated steel or stainless steel.

Door leaf flush with frame on hinge side. Adhesive EPDM rubber gasket to ensure tightness. Leakage flow : 9.8m³ / hour at 30 Pascal (tests available upon request).


Standard dimensions :

600 up to 1000 mm width * 2100 mm height free passage per door leaf (door leaf 180°).

Standard included:

Stainless steel hinges (4) and handles, European cylinder, reinforcement for door closer (hinge side), drop seal, sealed (closed) keep.

Standard colour range



Options:

Mechanical : Flush vision panel, kick or push plate, door closer, anti panic bar,

Electronical : Flush integrated electromagnet, adjustable ss contact bolt, Led signalisation, access control unit, ...

DOORS
MODEL LITE
60 S

