DOORS

MODEL PLUS

Description

Plus 60: Single or double door, door leaf thickness 60 mm. Door leaf consists of 2 steel sheets 0.8mm and rock wool core M0 (density 100kg/m³). Steel sheets pre-lacquered (see standard colours), powder coated (other colours) or stainless steel.
1 part monobloc frame with welded corners. Frame fabricated in bended zinc coated epoxy powder coated steel or stainless steel.
Door leaf flush with frame. Adhesive EPDM rubber gasket to ensure tightness.
Leakage flow : 9.8m3 / hour at 30 Pascal (tests available upon request).

Standard dimensions :
600 up to 1000 mm width * 2100 mm height free passage per door leaf (door leaf 180°).
Standard included:
Flush integrated stainless steel hinges (2) with bearings, stainless steel handles, european cylinder, reinforcement for door closer (hinge side), drop seal, sealed (closed) keep.

Standard colour range

Ral 9010	Ral 9002	Ral 7042	Ral 7032	Ral 7016	Ral 6018	Ral 5015	Ral 5010	Ral 3000	Ral 1018

Options:

Mechanical :
Flush vision panel, kick or push plate, door closer, anti panic bar, Adaptive profiles to meet wall thickness ….
Electronical :
Flush integrated electromagnet, adjustable ss contact bolt, Led signalisation, access control unit, …

REMAT &PARTNERS
+ 32 (0)56 70 11 60
www.rematcra.be

DOORS
MODEL LITE
60 S

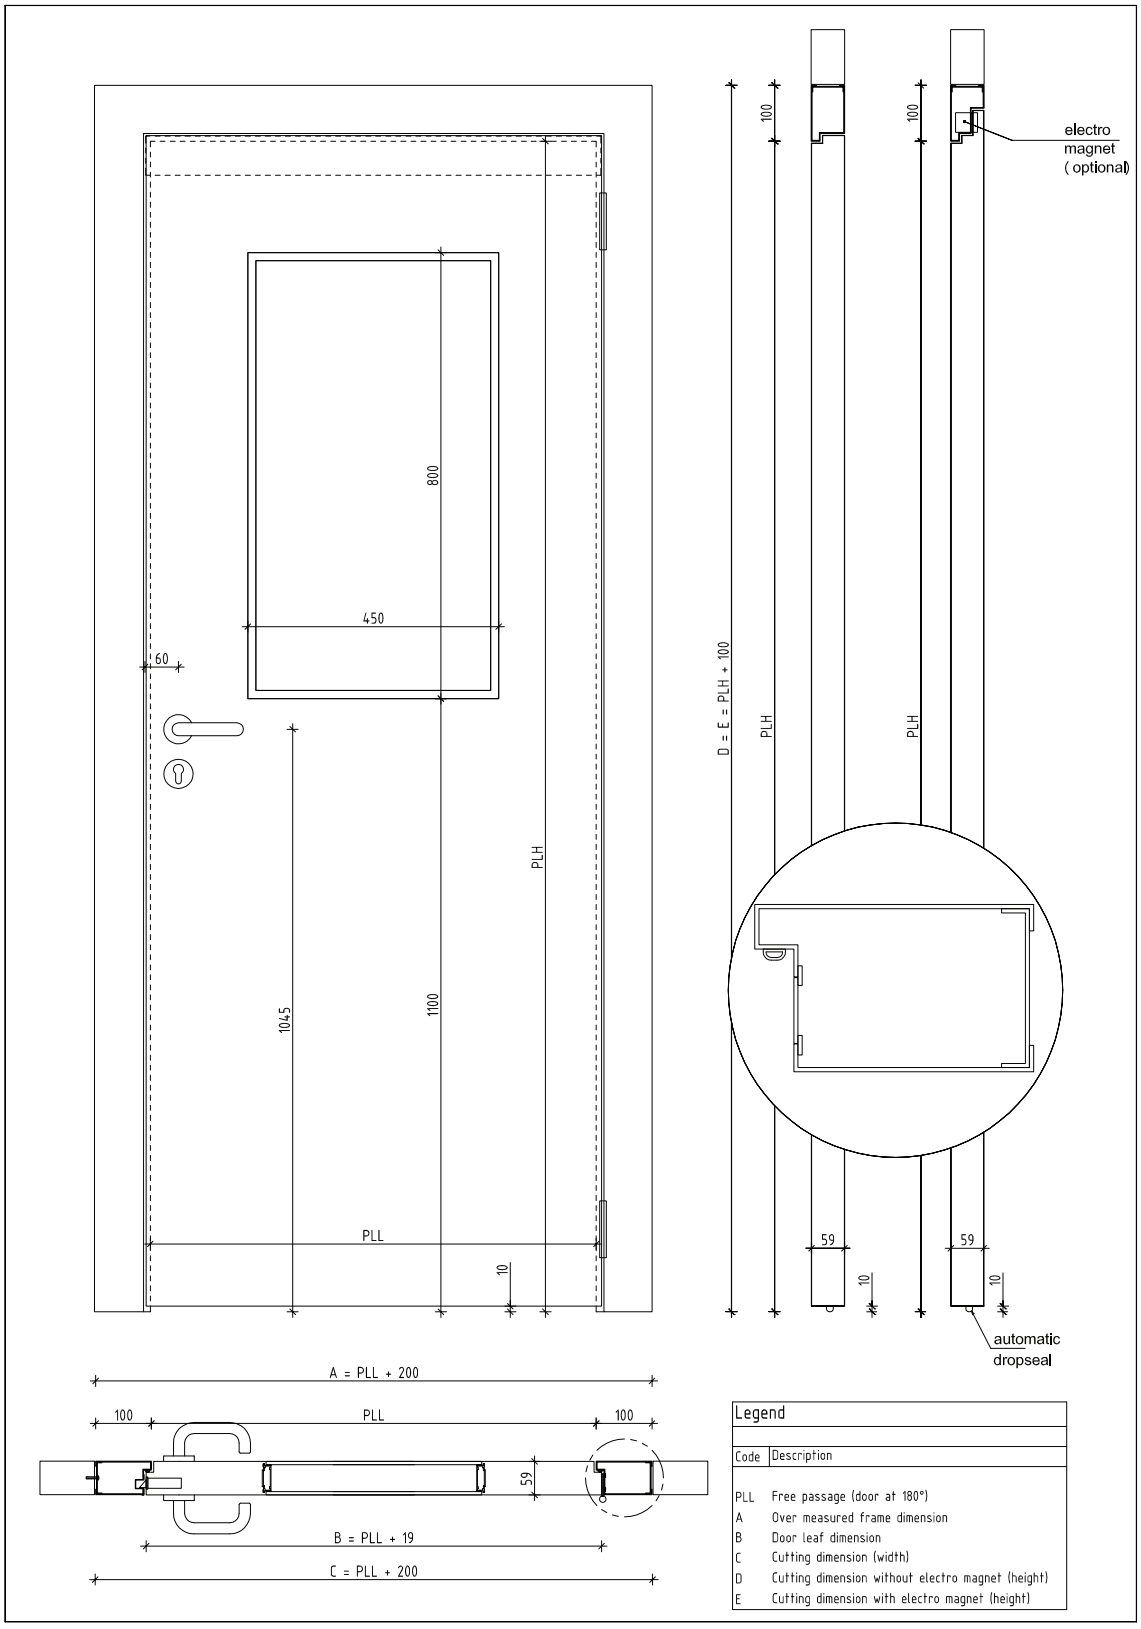

Legend	
Code	Description
PLL	Free passage (door at 180°)
A	Over measured frame dimension
B	Door leaf dimension
C	Cutting dimension (width)
D	Cutting dimension without electro magnet (height)
E	Cutting dimension with electro magnet (height)

+ 32 (0)56 70 11 60
www.rematcra.be