

CLIPS ACCESS HATCH

CLIPS ACCESS HATCH

STANDARD PROFILE 40, 60, 80 & 100MM



Applications

The access hatch is developed for easy installation in both walls and ceiling in controlled areas.

Specifications

- Frame consists of extruded aluminium (powdercoated) type clips counter clips.
- The door is manufactured with alu honeycomb cladded with prelacquered steelplate.
- Door opening by means of hinges up to 135°.
- Joint door frame reduced to minimum (siliconing).

Advantages

- Quick installation on site due to clip profile.
- Clean finishing in maintenance area.
- Identical design as vision panels.
- No visible fixings in controlled area.

Standard


- Hinges and adjustable fixings.
- Wall and ceiling thickness 40/60/80/100 mm.
- Standard colours : ral 9002/9010.

Options

- Different wall/ceiling thickness.
- Other colours.
- Locking by means of hexagonal key.
- Locking by means of key.
- Integrated stainless steel shelf.
- Second door on top (walkable).
- Gas spring.
- Glazed (tempered) doorleaf.

CLIPS ACCESS HATCH

STANDARD PROFILE 40, 60, 80 & 100MM

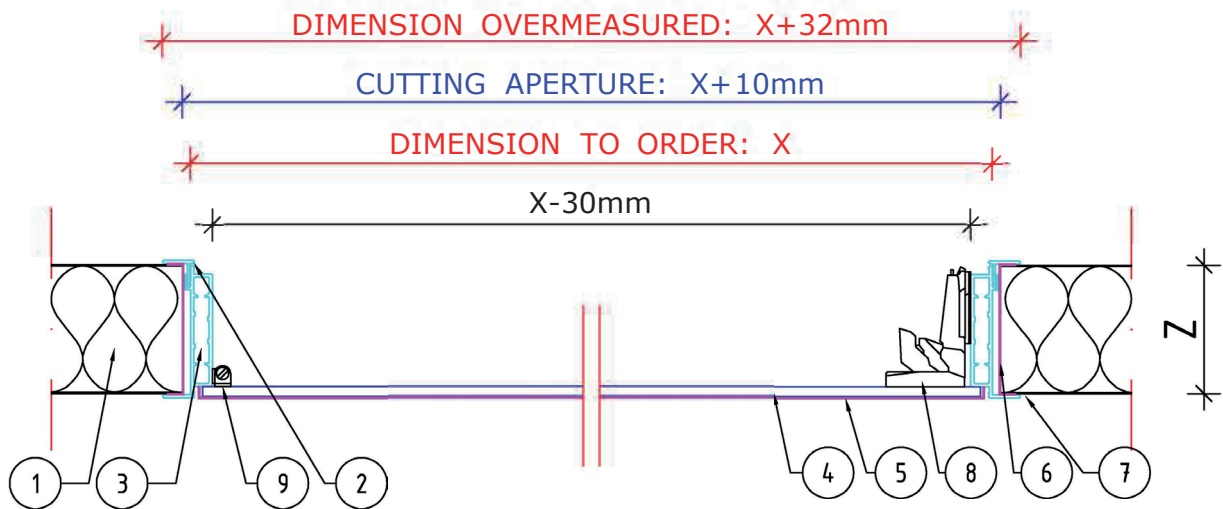

Legend:

Dimensions

All dimensions are in millimeter (mm)

Order sizes:

X: Width

Y: Height

Z: Thickness of partition

Requested cut-out in partition:

$X+10\text{mm}$: Width

$Y+10\text{mm}$: Height

Overmeasured dimensions:

$X+32\text{mm}$: Width

$Y+32\text{mm}$: Height

$Z+4\text{mm}$: Thickness

Materials:

- 1 Partition
- 2 Lacquered aluminium clips profile
- 3 Aluminium base profile
- 4 Alu honeycomb 6mm
- 5 Lacquered steel sheet
- 6 Reinforcement steel U profile
- 7 Silicon seal
- 8 Demountable hinge
9. Doorlock

